

P E R S O N S L U S E R S 1 5 0

Den nyeste udviklede personsluse i den firkantede serie, top kvalitet til en særdeles attraktiv pris.

Velegnet til alle steder hvor højeste passage sikring ønskes, også særdeles velegnet til Fitness centre for kontrolleret adgang ved ubemandede indgange. .

Vi har monteret den som passage sikring ved datacentre, ministerier, industrier mv.


Leveres i 2 standardudførelser:

1050 x 1050 mm fri passagebredde 580mm x 2000

Plus model: 1150 x 1150 mm fri passage 700mm x 2000mm

Alt er indeholdt, man skal ikke tilkøbe funktioner ! :

- ☒ En person kontrol i sluserum
- ☒ Alarmfunktion ved left object i sluserum
- ☒ Samtaleanlæg med svartelefon der for eksempel kan monteres i reception.
- ☒ Glastykkelse 26/27mm, Skudsikkert klasse BR3/S (0,357 Magnum),
Indbrudssikret klasse P6B (minimum 30 øksehug for at lave hul 40 x 40 cm)
- ☒ Batteri Back-up
- ☒ Gulvtykkelse kun 20mm= kan monteres direkte på eksisterende gulv
- ☒ Forsyning: 230 V lavt strømforbrug kun 85 W
- ☒ Forberedt for tilslutning af kortlæser, alle / ADK kortlæsesystemer kan tilsluttes!

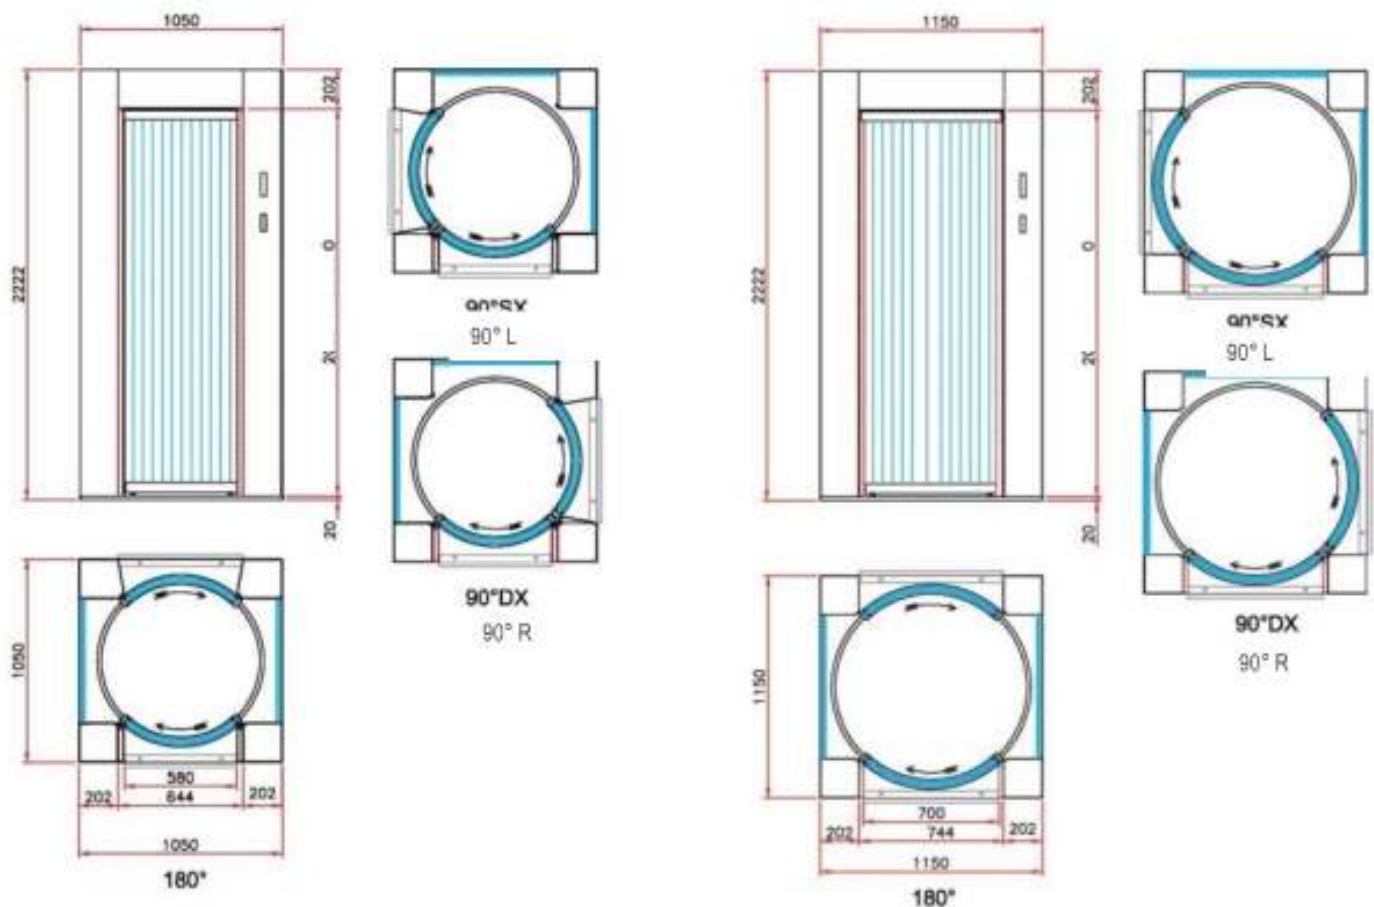

TECHNICAL SPECIFICATIONS

- **DIMENSIONS:**
 - TOP 150 L 1050 x W 1050 x H 2222 mm
 - TOP 150 PLUS L 1150 x W 1150 x H 2222 mm
- **FREE PASSAGE AREA:**
 - TOP 150 L 580 x H 2000 mm
 - TOP 150 PLUS L 700 x H 2000 mm
- **WEIGHT:** from 700 to 900 Kg according to the model and additional options
- **POWER SUPPLY:** 230 V (110 V on request), 50/60 Hz
- **VOLTAGE:** 12-24 V.d.c. with back-up batteries for uninterrupted operations in case of power loss (from 100 up to 1000 cycles)
- **CONSUMPTION:** 85W
- **THROUGHPUT:** 4-5 full cycles/1' one sense; 7-8 full cycles/1' two senses according to the model and additional options
- **FRAME**
 - one-block painted steel frame
 - steel sides on applications
 - cabins floor: 20 mm thick (cabins do not need to be recessed)
- **PAINTING AND FINISHING:** RAL colours code range standards with «orange skin» finishing (flat finishing, stainless steel execution and other colours on request)
- **GLASS:** sides and doors equipped with 26/27 mm laminated thick glass rated BR3/S P6B (different glass thickness on request)
- **LIGHTING:** inside lighting with 12 V, 50/60 Hz led spots
- **MOVEMENT:** 24 V.d.c. electric-motors assisted sliding-doors movement with reversible option for manual opening in case of total power loss
- **ELECTRONICS:** microprocessor based electronics
- **ACCIDENT PREVENTION MEASURES:** self-adjusted braking, speed control and accident prevention devices
- **PROGRAMMABLE OPTIONS:** emergency escape/door locks; automatic/manual transit; passage one/both directions