

# ■ *Duetto AC MIDI*

PRIORA booths

Duetto AC MIDI is an automatic interlocked booth with curved double sliding doors, round base, available both in painted and stainless steel. The curved double doors open simultaneously to halve the crossing time and to provide high flow passage. **900 mm free width allows a simple passage also to handicapped people.**

Duetto AC MIDI has been designed specifically for headquarters buildings and important commercial premises where style and architectural elegance must match an inviting appearance with the need for access control.

No pit form is requested as **the floor thickness is 12 mm only.**

This booth is almost completely glazed and can be easily installed in many places, due to the **availability also in separate parts for local assembling.**


## ■ *features and options*

- > automatic **volumetric control system** for single passage check (on request)
- > automatic volumetric control system for single passage check (on request)
- > mag-stripe/proximity card reader or biometric identification (on request)
- > intercom / speech synthesizer for users assistance (on request)
- > control and programming console
- > interface ports for access control systems (RS 232, RS 485, IBIS)



**TONALI S.p.A.**

## ■ **technical specifications**

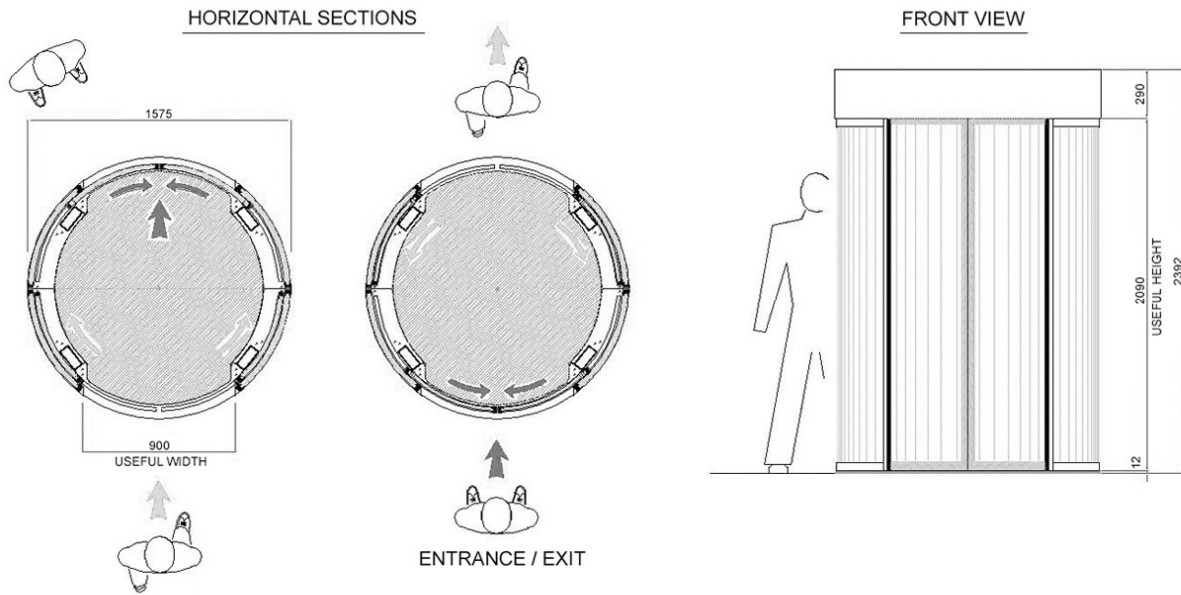

- > size: 1575 Ø x 2392 H mm
- > weight: from 900 to 1040 kg according to the version requested
- > power supply: 220 V, 50/60 Hz
- > power consumption: 100 W
- > voltage: 12-24 VDC
- > **throughput:** 5-6 full passages/1' one-way; 10-11 full passages/1' two ways
- > battery backup provides more than 1000 cycles (12V – 18Ah)
- > casing 3 mm; delivery in separate parts on request
- > paint finish: colours within the standard RAL range "orange skin" finish (flat finish or **stainless steel execution on request**)
- > fixed, laminated glass security panels, thickness 11 or 20 mm
- > automatic double doors with laminated security glass, thickness 11 or 20 mm
- > doors motors: reversible (with locking piston for the high door) 24 VDC motors. Different options on request
- > spot lights 12V, 50/60 Hz
- > programmable micro-processor electronics
- > electronically self-adjusted braking, speed control and accident prevention devices
- > functions selection:
  - \_ automatic/semi-automatic
  - \_ one way – two ways
  - \_ emergency modes
- > floor covering: rubber carpet, black colour. **Floor thickness: 12 mm**
- > **free passage area:** 900 W x 2090 H mm



**Tonali S.p.A.**  
via S. Caterina 25  
20010 Arluno (MI)  
Italy

**www.tonali.it**  
**e-mail** tonali@tonali.it  
**tel** +39 02 90374.1 (15 linee)  
**fax** +39 02 90374.266